



# BOL100 Midi Post Light

Straight to mains IP54, 610lm post light

## Features

IK Rating	IK04
IP Rating	IP54
CSP Switchable	Single CCT
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4

## Installation information

UK Bathroom Zone	2
Inrush Current	20A
Construction Material	Aluminium / PVC
Weight	1.2kg
Ambient Temperature Range	40°C
SELV	SELV
Electric Class (1, 2, 3)	1

## Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
BOL100X30	Black RAL9011	11W	3000K	360°	610	55	92

## Wiring information

Cable Required for Connector	3x 1.0mm <sup>2</sup>
Type of Wiring Required	Parallel

## LED driver

N/A (Integrated SLEV driver)	220-240V	Yes	No	2	-	-
------------------------------	----------	-----	----	---	---	---




## Accessories

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
-----	--	-----------------



collingwood

01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

## Guarantee

5 years


## Features & benefits

- 11W
- IP54 ideal for walk ways and step lighting
- Benefiting from light all round with a 360° beam angle
- Straight to mains screw terminals
- Ideal for residential landscape projects, such as lighting low level shrubs
- Ideal to light up car parking spaces and driveways
- High lumen output of 610lm
- Great for soft illumination onto stone paths

Light source energy efficiency:



Beam angle: 360°

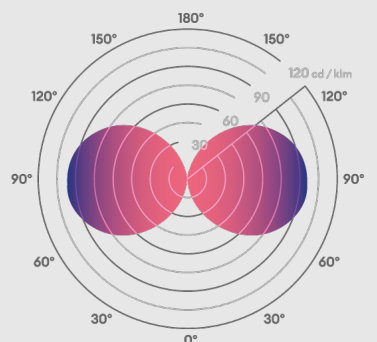

Ø80mm

