






01604 495 151
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

BOL200 Midi Bollard

Straight to mains, IP65, 930lm bollard

Features

IK Rating	IK04
IP Rating	IP65
CSP Switchable	Single CCT
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4

Installation information

UK Bathroom Zone	2
Inrush Current	20A 0.5ms
Construction Material	Aluminium / PVC
Weight	2.6Kg
Ambient Temperature Range	40°C
SELV	SELV
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
BOL200X30	Black RAL9011	23W	3000K	360°	930	40	108

Wiring information

Cable Required for Connector	3x 1.0mm ²
Type of Wiring Required	Parallel

LED driver

N/A (Integrated SLEV driver)	220-240V	Yes	No	2	N/A	N/A
------------------------------	----------	-----	----	---	-----	-----

Accessories

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
-----	--	-----------------

Guarantee


5 years

Features & benefits

- 23W
- IP65 ideal for car parks and walk ways
- Benefiting from light all round with a 360° beam angle
- Straight to mains screw terminals
- Frosted window effect at the top
- Low glare illumination, ideal for pathways, boundary marking, or general illumination of exterior spaces
- High lumen output of 930lm

Light source energy efficiency: 

Beam angle: 360°

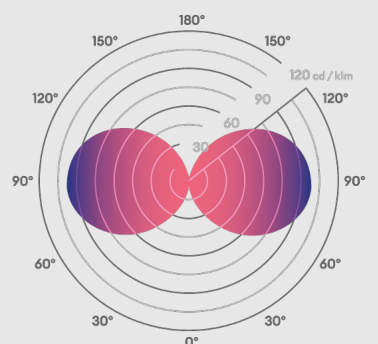

Ø145mm

