




LP40W-*000K-SIL

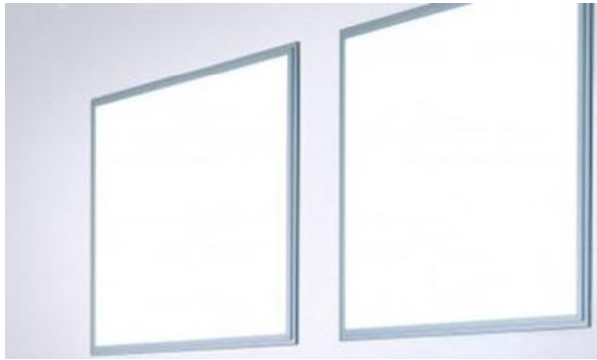

FEATURES

- 50% energy saving which means 50% CO₂ reduction
- No UV or IR emissions
- Durable with life span over 50,000 hours
- Environmentally friendly - fully recyclable, no mercury or other hazardous materials
- Simple and convenient installation
- Dimmable version available

APPLICATIONS

- Offices
- Restaurants
- Hotels
- Schools
- Hospitals
- Receptions
- Meeting Rooms

CAUTIONS

- Indoor use only
- Do not open – no serviceable parts

LED RIDGE LIGHTING ULTRA SLIM PANEL LIGHT

The Ledridge Lighting Ultra Slim panel light utilises high quality super bright LEDs as a light source which means stability, a long life span and no UV or IR emissions. The anodized aluminium frame is a modern, timeless finish which will suit many different applications. The panel is powered by a low voltage driver which is safe, energy efficient and makes for an extremely quick and simple installation process.

The Ledridge Lighting Ultra Slim panel light is the ideal replacement for traditional 600 x 600 grid fittings.

SPECIFICATIONS

DIMENSIONS:	595*595*12mm
LUMEN OUTPUT:	
4000K	2800lm
6000K	3000lm
CONSUMPTION:	
4000K	40W
6000K	40W
EFFICIENCY:	
4000K	70lm/w
6000K	75lm/w
LIFE SPAN:	50,000 hours +
HOUSING:	Anodized Aluminium
BEAM SPREAD:	
4000K	120°
6000K	120°
OPERATING TEMPERATURE:	-40°C to +40°C (Amb.)
INPUT VOLTAGE:	100-240V/AC
WORKING VOLTAGE:	20-36v/DC
NETT WEIGHT:	4200g

